


TEAC

CX270

MODEL

SERVICE MANUAL

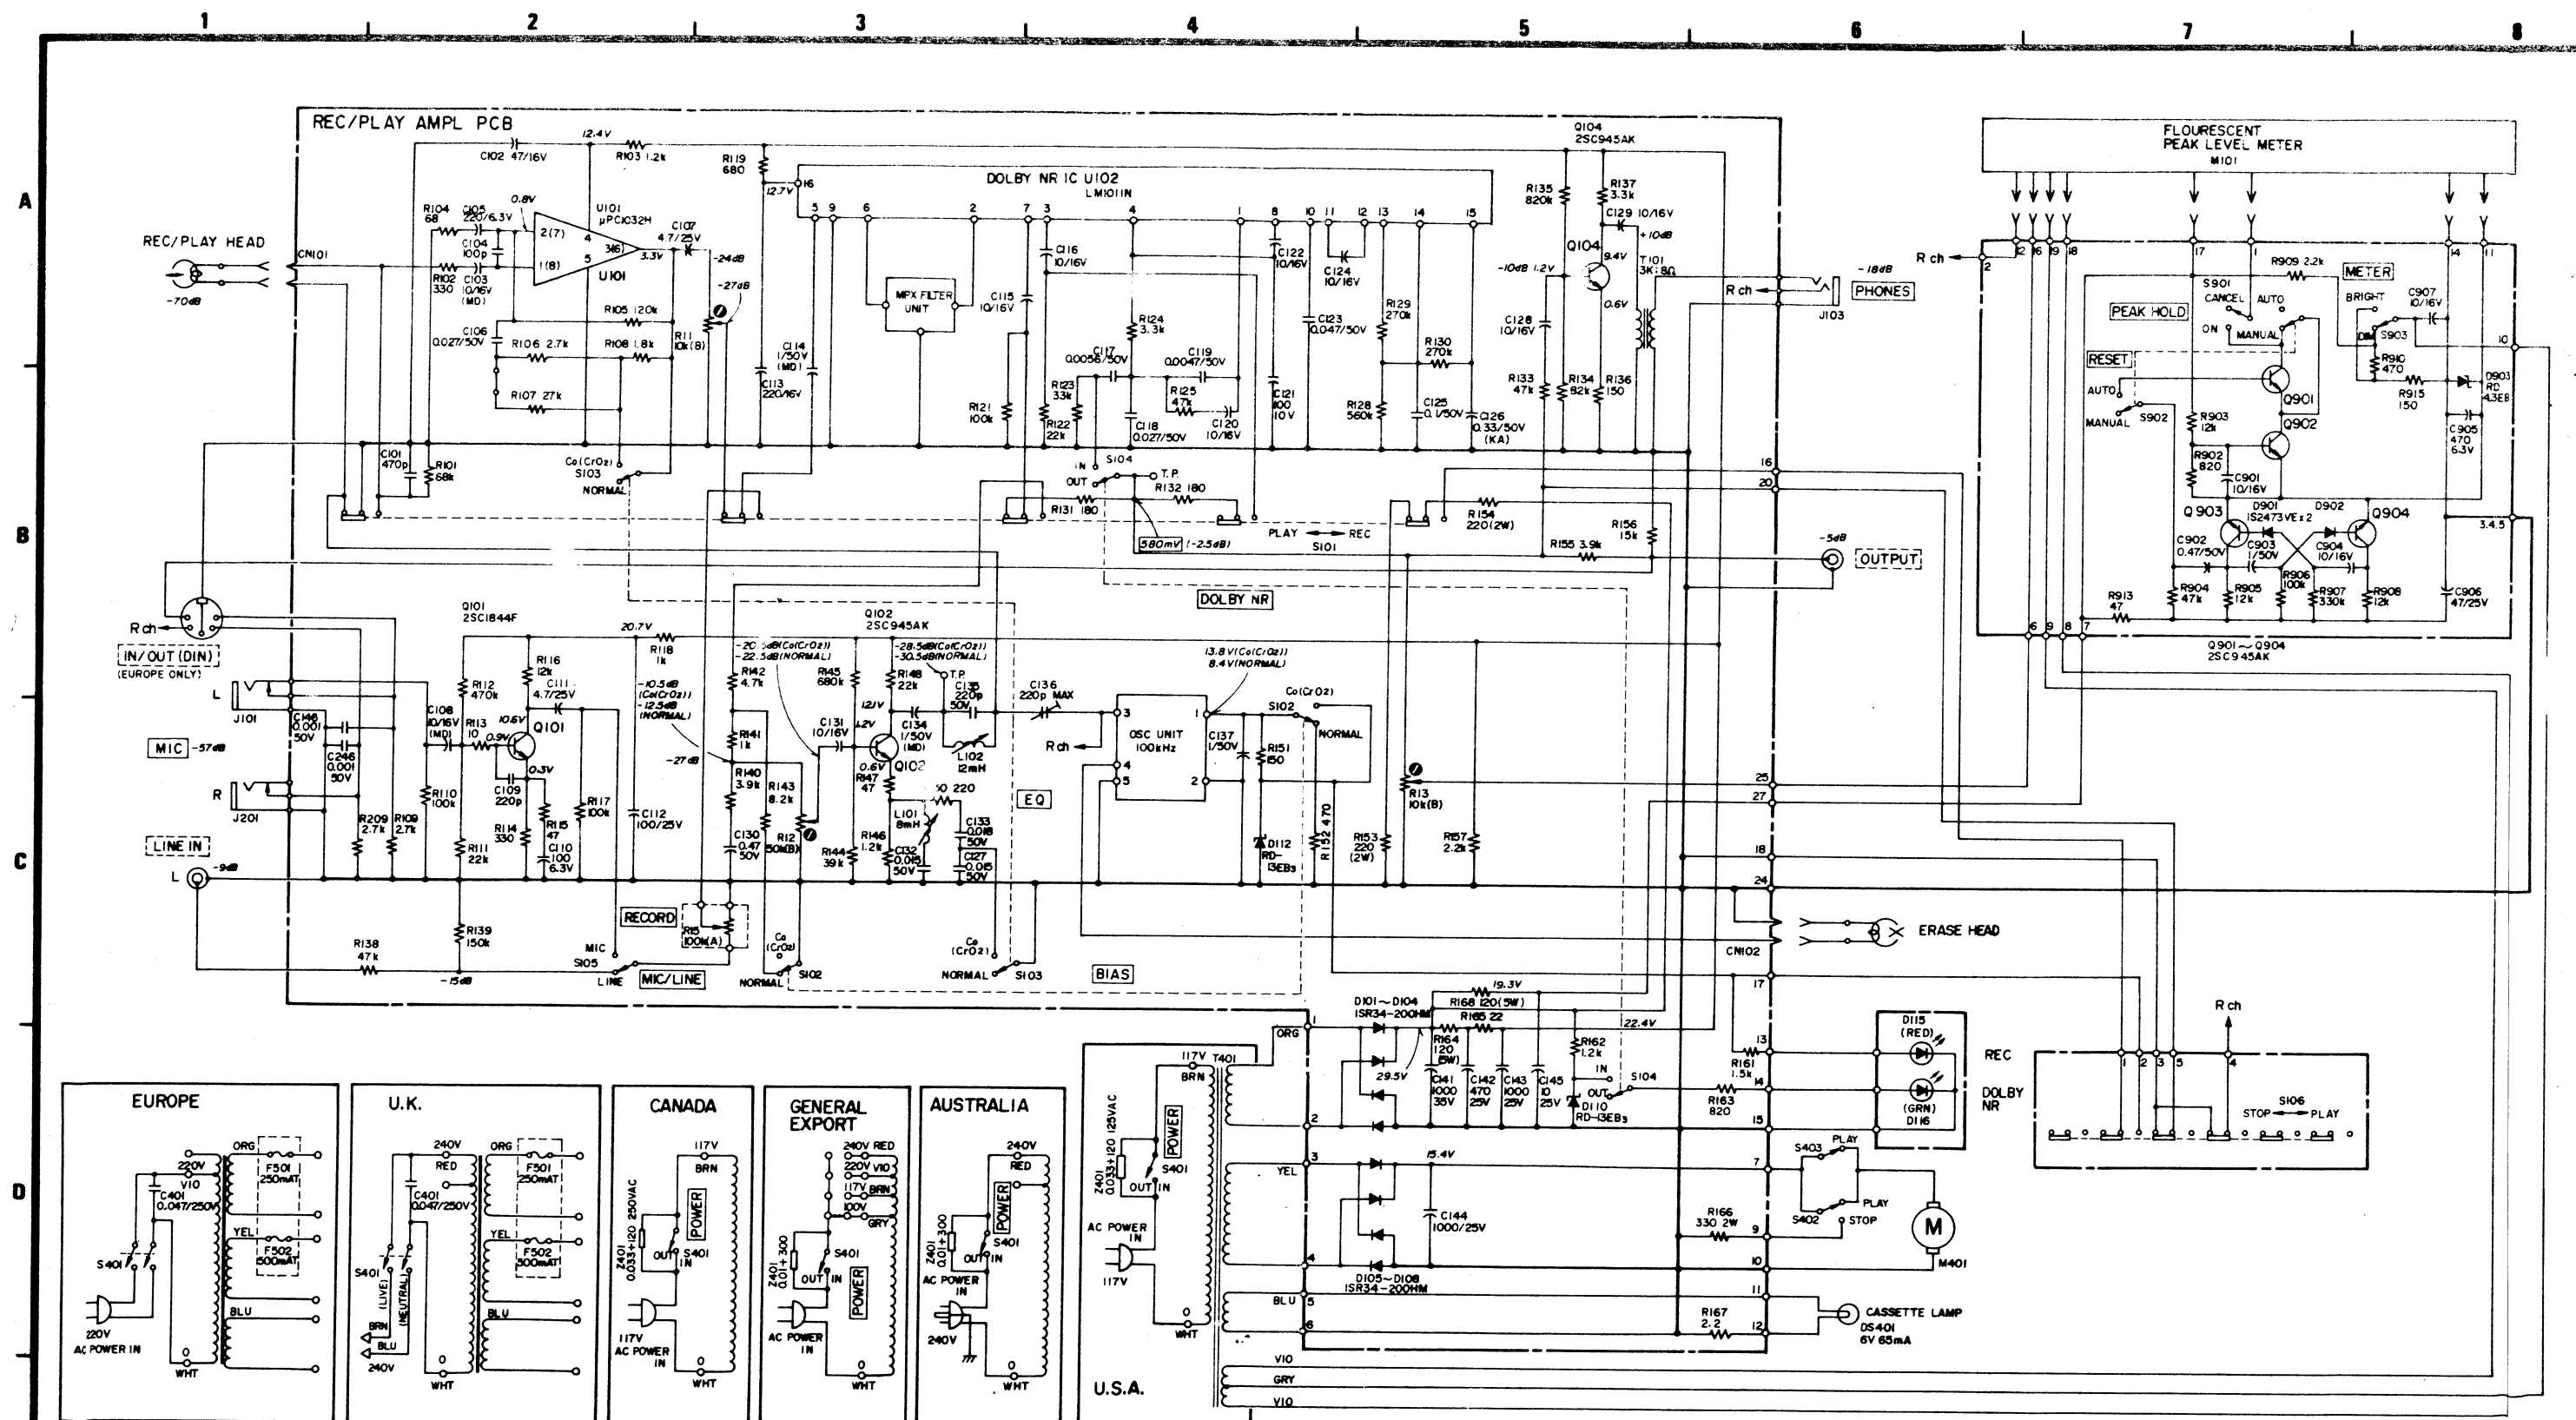

U101	μPC1032H	Q901~Q904	2SC945AK
U102, U202	LM1011N	D901, D902	1S2473VE
Q101, Q201	2SC1844F	D903	RD-4.3EB
Q102, Q202	2SC945AK		
Q104, Q204	2SC945AK		
D101~D108	1SR34-200HM		
D110, D112	RD-13EB ₃		

NOTES.

- ALL RESISTORS ARE 1/4 WATT, 5%, UNLESS MARKED OTHERWISE. RESISTOR VALUES ARE IN OHMS (k = 1,000 OHMS, M = 1,000,000 OHMS).
- ALL CAPACITOR VALUES ARE IN MICROFARADS (p = PICO FARADS).
- SCHEMATIC DIAGRAM SHOWN FOR LEFT CHANNEL EXCEPT FOR SOME OF THE COMPONENTS.
- DC VOLTAGES WERE MEASURED DURING RECORD PAUSE MODE UNLESS OTHERWISE NOTED.